


PPE-9M (PET / PET / EVA Primer)

- > 9 mil thickness
- > PET based backsheet
- > Hydrolysis resistant
- > UV stable
- > EVA primer for improved bond strength

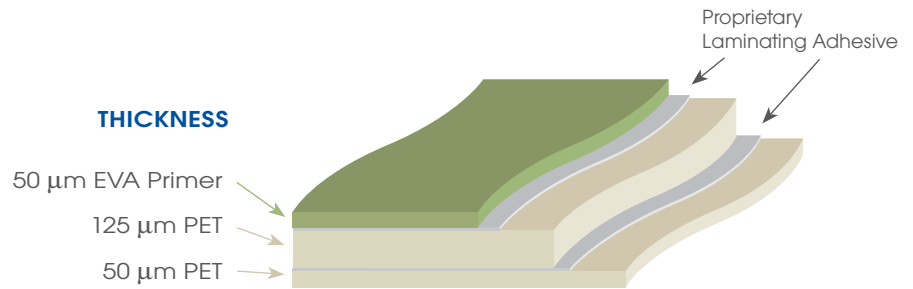

PROPERTIES	METHOD	UNIT	VALUE
Laminate Thickness		μm	245 ± 5%
Weight		g/m ²	320 ± 5%
Tensile Strength (MD)	ASTM D882	MPa	177
Tensile Strength (TD)	ASTM D882	MPa	216
Elongation at Break (MD)	ASTM D882	%	205
Elongation at Break (TD)	ASTM D882	%	125
Dimensional Stability (MD)	ASTM D1204	%	0.9
Dimensional Stability (TD)	ASTM D1204	%	0.3
Interlayer Peel Strength (PET/PET)	ASTM D1876	N/cm	**
Encapsulant Peel Strength	ASTM D1876	N/cm	>92*
MVTR (37.8°C / 100% RH)	ASTM F1249	g/m ² day	3.1
Breakdown Voltage	ASTM D149	kV	16
Maximum System Voltage	IEC 60664-1	VDC	>850

* Exceeds maximum force of peel tester

** Laminating adhesive bond strength exceeds that of 50 μm PET



- The data above are based on both internal and third party testing. They are representative and are provided for comparison purposes only.
- Other thicknesses are available upon request.

Commonwealth Laminating & Coating, Inc. (CLC) is a world-class manufacturer of high performance, precision coatings on flexible film substrates and laminates. With a core competence in materials science, CLC offers unique and innovative solutions for the renewable energy products industry.

345 Beaver Creek Drive
Martinsville, VA 24112
276.632.4991
www.commonwealthlaminating.com

PN0294 ©9/2012
Commonwealth Laminating & Coating, Inc.
Made in the USA